



Energetic Lighting's E5SLB stairwell, strip and surface mount series is suitable for use in a broad range of commercial and industrial applications. Utilizing today's latest innovative LED solutions and technologies, this series provides the perfect blend of design, performance and reliability at a superior value to the customer. An extremely versatile product thanks to its all purpose design and durable construction that consists of a steel housing with tool-less access to the driver and LED boards and multiple lumen output and CCT options. The E5SLB is well suited for many renovation and new construction applications including stairwells, hallways, restrooms, storage areas, warehouses, under canopy, etc. Providing quality all-purpose reduced glare illumination where needed with maximum energy savings.

## Features

- Designed for easy wall & surface mounting
- Multiple conduit knockouts on all four sides
- Full fixture length wiring access for installation flexibility
- High efficiency polymer diffusing lens for no pixelation
- Utilizes 0-10V drivers as standard
- 89.0% lumen maintenance @ 60,000 hours - L89/60,000 (per IES TM21)
- Projected L70 @ 180,000 hours (per IES TM21)
- Available in 4000K & 5000K @ 83 CRI
- 2793 lms, 19.4W @ 144 LPW (4', 4000K)
- 5098 lms, 34.9W @ 146 LPW (4', 4000K)
- 5181 lms, 34.9W @ 148 LPW (4', 5000K)
- All configurations are DLC Premium qualified


## Applications

- Stairwells
- Hallways
- Restrooms
- Storage areas
- Warehouses
- Under canopy

## Specification

Order Number	30095	30096	30097
Model Number	E5SLB20D4-840	E5SLB35D4-840	E5SLB35D4-850
Configuration	Fixed CCT	Fixed CCT	Fixed CCT
Body Color/Finish	White	White	White
Beam Angle	120°	120°	120°
Lumen Output	2660 LM	4641 LM	4654 LM
Luminous Efficacy	135.16 LM/W	134.13 LM/W	135.25 LM/W
Input Power	19.68 W	34.6 W	34.41 W
Input Voltage	120-277 Vac	120-277 Vac	120-277 Vac
Power Factor	0.95	0.95	0.96
THD	0.09	0.09	0.09
Color Temp (CCT)	4000 K	4000 K	5000 K
Color Rend (CRI)	83	83	83
Lifetime Rating	50000 hours	50000 hours	50000 hours
Warranty	5 Years	5 Years	5 Years
Dimmability	0-10v	0-10v	0-10v
Operating Temp	-4 to 104 (°F)	-4 to 104 (°F)	-4 to 104 (°F)
Environment	Damp Location	Damp Location	Damp Location
DLC	DLC Premium	DLC Premium	DLC Premium
Safety Cert	UL	UL	UL
Weight	3.91 LBS	4.34 LBS	4.34 LBS
Dimensions	47.7"(L)x2.4"(W)x3.1"(H)	47.7"(L)x2.4"(W)x3.1"(H)	47.7"(L)x2.4"(W)x3.1"(H)

### Photometric Data

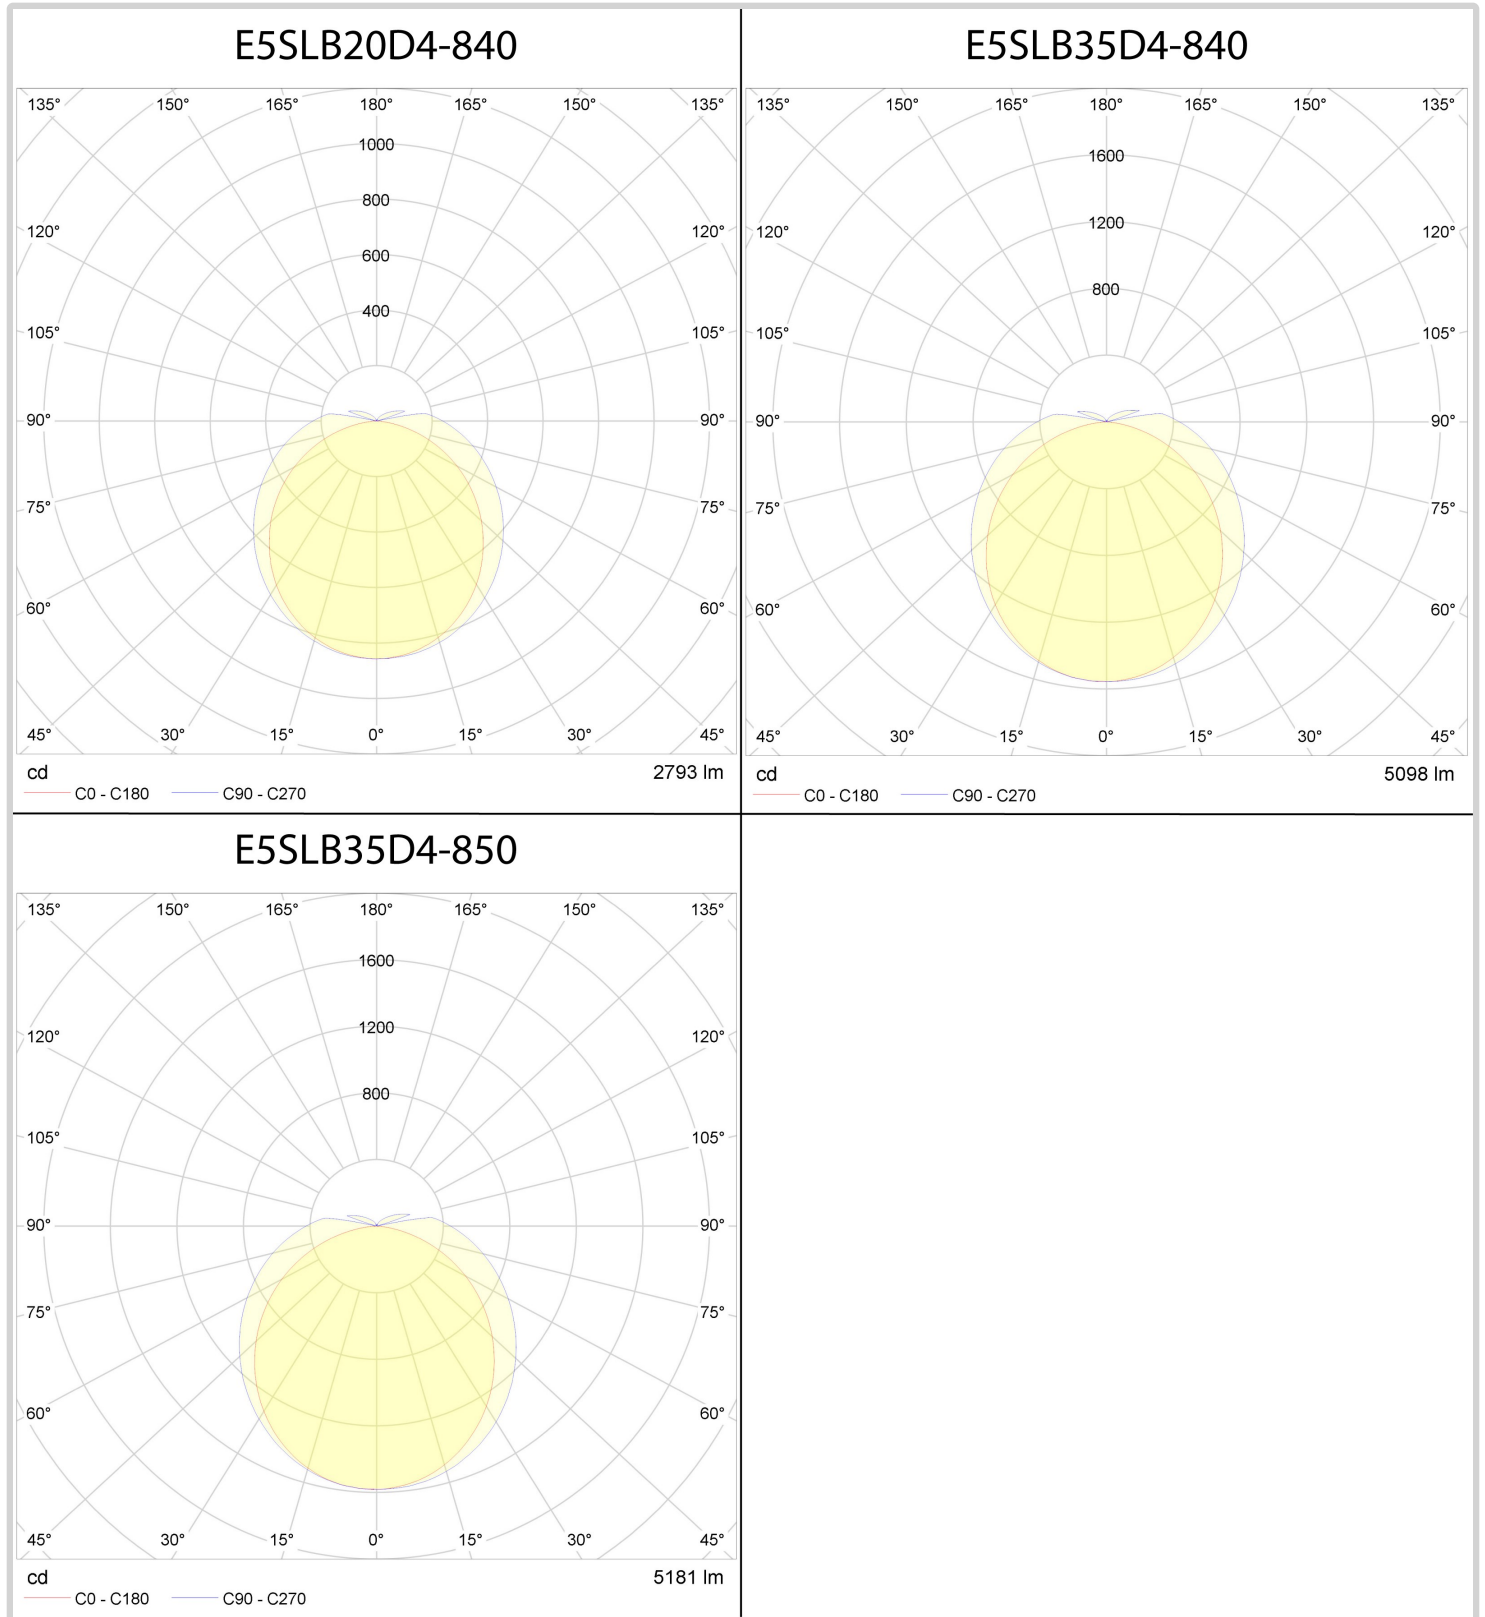

## Dimensions and Packaging Info

Model Number	E5SLB20D4-840	E5SLB35D4-840	E5SLB35D4-850
Item UPC	8 4594000881 1	8 4594000882 8	8 4594000883 5
Case UPC	10 8 4594000881 8	10 8 4594000882 5	10 8 4594000883 2
Master Carton UPC			
Item(s) per pack	1	1	1
packs per case	6	6	6
Case per Master			
Item weight	6	6	6
Case weight	36	36	36
Master Weight			
Item pack dimensions			
Case dimensions			
Master dimensions			