



Energetic Lighting's E4FMR series of LED round flushmount fixtures are designed to emulate the look and feel of traditional circline fluorescent tube flushmount fixtures, but operate at a significantly lower wattage. Fixtures are available in 13 inch diameter option, replacing one of the most commonly used configurations. ezCCT and ezWatt features allow for field-selection of CCT (3000K, 4000K, or 5000K), and wattage (22W, 18W, or 15W), both accessible by removing the diffuser. Installation is quick and simple when mounting over standard ceiling junction boxes, and further output control is available by installing on circuits with standard wall triac dimmers. With a CRI of >90, this fixture will bring out vibrant true-to-life colors of all objects illuminated within the room. Constructed with a durable steel housing body and LED lifetime rating of at least 50,000 hours, this rugged flushmount is designed for many years of reliable operation.

Features

- EZCCT field-selectable CCT - 3000K (std), 4000K & 5000K @ >90 CRI
- EZWATT field-selectable Wattage - 3 steps, varied by models (see stock ordering information)
- Standard twist install keyhole slots for easy installation over standard ceiling junction box screws
- Suitable for dry or damp location installations
- Dimmable down to 10% with standard triac wall switch dimmers
- Minimum 84% lumen maintenance @ 50,000 hours – L84/50,000 (per IES TM21)
- Minimum projected L70 @ 104,000 hours = maintenance free illumination (per IES TM21)


Applications

- Indoor
- Residential
- Commercial
- Retail
- Office
- Healthcare
- Hospitality
- Multi-family
- Hallway

Specification

Order Number	40045
Model Number	E4FMR1522D-93050
Configuration	13" round CCT&W Select
Lumen Output	1100, 1300, 1600 LM
Luminous Efficacy	72.7 LM/W
Input Power	15W, 18W, 22W Select W
Input Voltage	120 Vac
Power Factor	0.98
THD	<0.2
Color Temp (CCT)	3000K, 4000K, 5000K Select K
Color Rend (CRI)	95
Lifetime Rating	50000 hours
Warranty	10 Years
Dimmability	Triac dimmable
Operating Temp	-4 to 104 (°F)
Environment	Damp Location
Energy Star	Energy Star
Safety Cert	ETL
Weight	1.5 LBS
Dimensions	12.6x12.6x3.5 (in)

Photometric Data

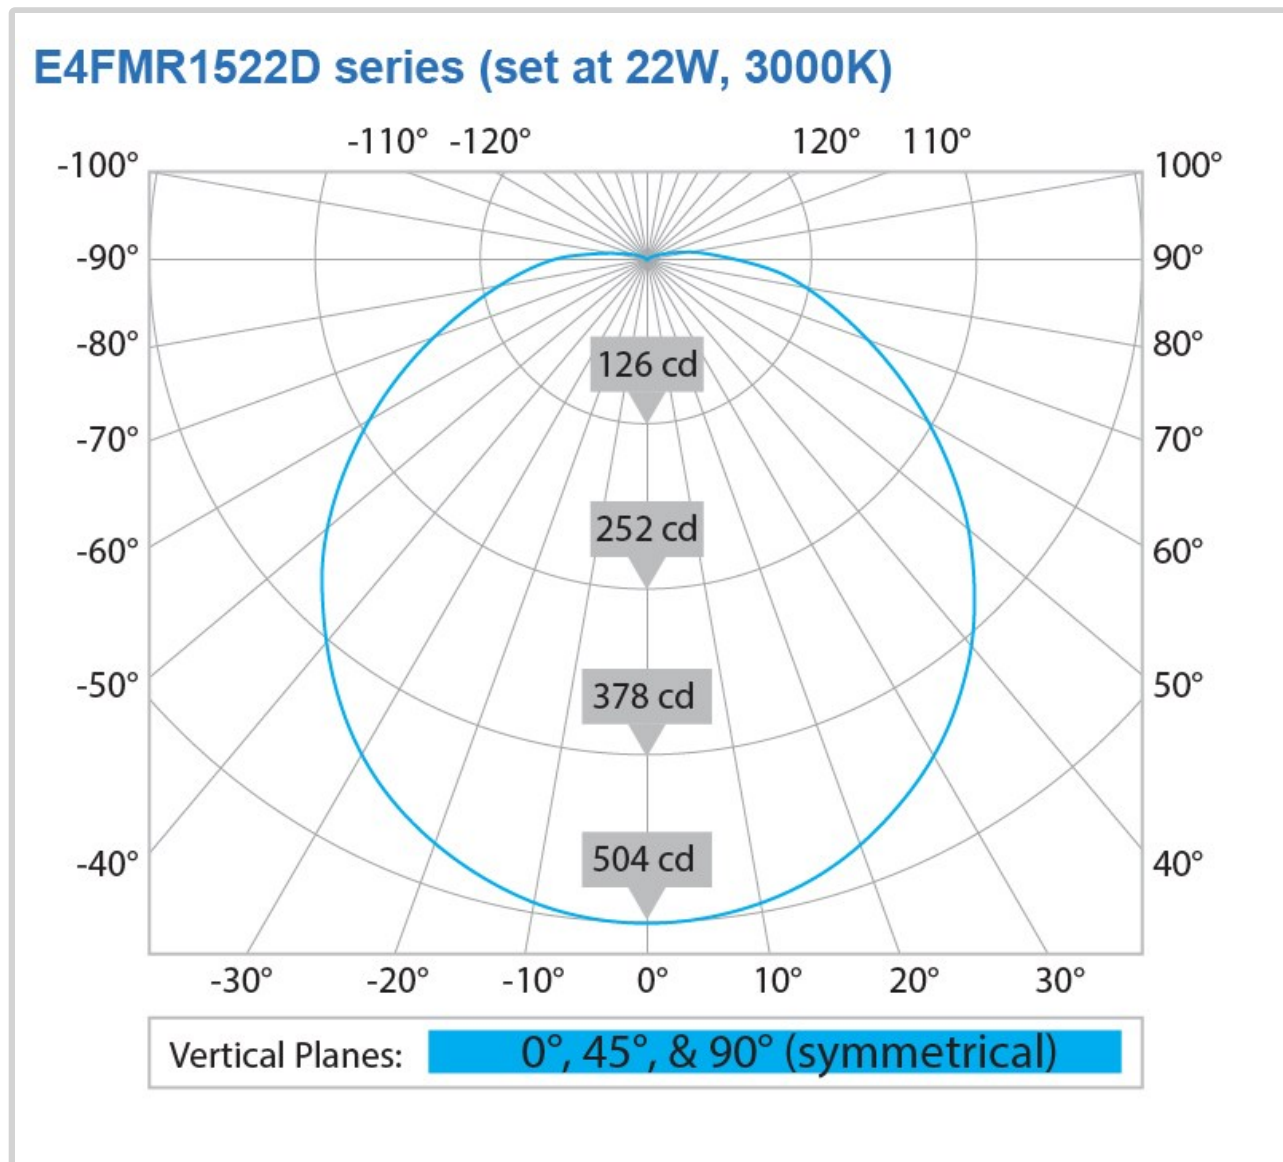

Supplementals Information

Highlights



Field-selectable CCT and Wattage control provides flexibility to installation and stocking



Standard toolless twist lock diffuser lens for easy inner compartment access



Easily install over standard junction box mounting screws

Dimensions and Packaging Info

Model Number	E4FMR1522D-93050
Item UPC	845940009900
Case UPC	10845940009907
Master Carton UPC	
Item(s) per pack	6 per pack
packs per case	
Case per Master	
Item weight	2.5 LBS
Case weight	17.5 LBS
Master Weight	
Item pack dimensions	13.75x13.75x4.25 (in)
Case dimensions	28.5x15x13.5 (in)
Master dimensions	