



Energetic Lighting's E2FMA series of LED round flushmount fixtures are designed to emulate the look and feel of traditional circline fluorescent tube flushmount fixtures, but operate at a significantly lower wattage. Fixtures are available in multiple diameter options, 9", 15", and 19", making the choice easy for any type of application. Installation is quick and simple when mounting into standard ceiling junction boxes, and may be installed on circuits with standard wall dimmers. Constructed with a durable steel housing body and LED lifetime rating of at least 50,000 hours, this rugged flushmount is designed for many years of reliable operation.

Features

- Tool-less diffuser attachment
- Minimalistic and efficient design
- Mercury-free construction
- Suitable for Damp Location use
- Easy and secure installation
- TRIAC Dimmable to 10% output


Applications

- Multi-family and Apartments
- Overhead & Hallway lighting
- Ambient room lighting
- General lighting

Specification

Order Number	40022
Model Number	E2FMA19-840
Body Color/Finish	
Optical Distribution	
Lumen Output	2300 LM
Luminous Efficacy	72 LM/W
Input Power	32 W
Input Voltage	120 Vac
Power Factor	0.98
THD	<0.2
Color Temp (CCT)	4000 K
Color Rend (CRI)	85
Lifetime Rating	50000 hours
Warranty	5 Years
Dimmability	Triac dimmable
Operating Temp	-4 to 104 (°F)
Environment	Damp Location
Certification(s)	
Weight	3.3 LBS
Dimensions	19.0" (D) x 4.5" (H)
Beam Angle	110°
Energy Star	Energy Star
Safety Cert	UL

Photometric Data

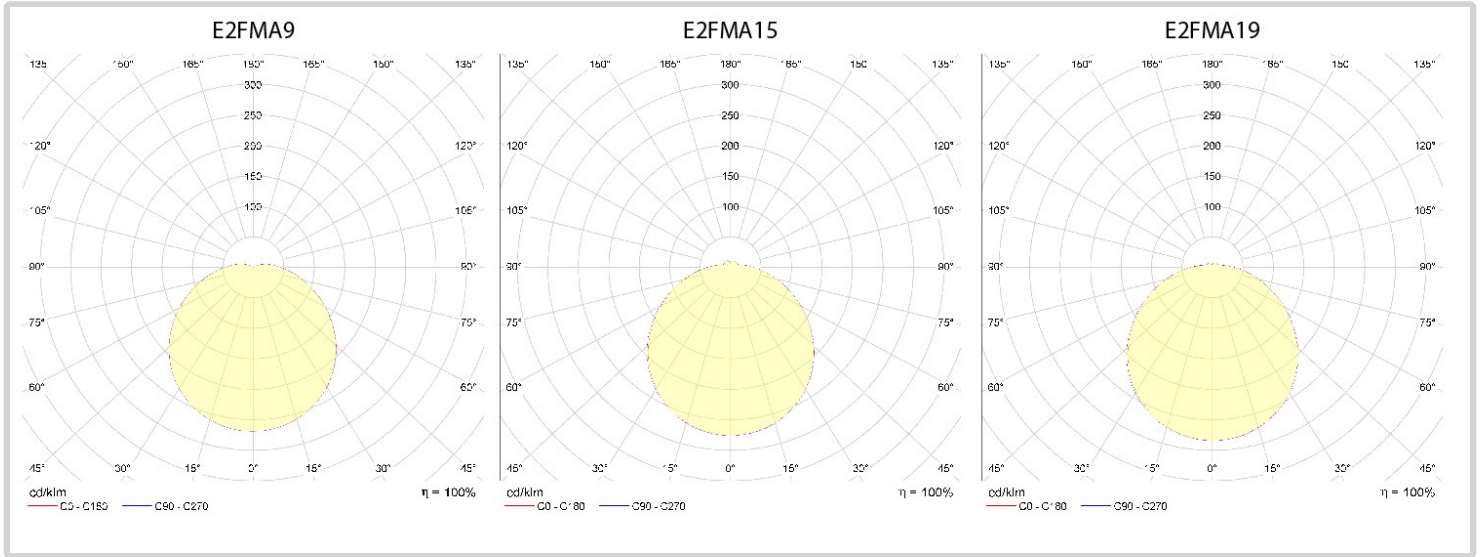

Dimensions and Packaging Info

Model Number	E2FMA19-840
Item UPC	8 4594000605 3
Case UPC	10 8 4594000605 0
Master Carton UPC	
Item(s) per pack	1 fixture per package
packs per case	4 packs per case
Case per Master	
Item weight	5 lbs
Case weight	24 lbs
Master Weight	
Item pack dimensions	5.75 (L) X 5.5 (L) X 5.5 (H)
Case dimensions	23 (L) X 22 (W) X 22 (H)
Master dimensions	